

- THD 10%
-
- 0-10V
- : 4kV 6kV
-
- Class I
-
- &
- IP67
-
-



EUC-030SxxxDVM000x

30W IP67

90-305Vac

					120Vac	220Vac	

- 1 120-240Vac 127-250Vdc CCC KS
- 2 220 Vac
- 3 SELV

				100% 120Vac
				100% 220Vac
(I ² t)				220Vac 25°C 10%Ipk-10%Ipk = 32.8μs
				100-240Vac 50-60Hz 65%-100% (19.5-30W)
				200-240Vac 50-60Hz 65%-100% (19.5-30W)

				100%
				100%
				100%
			±	100%
			±	220Vac
		°		°

Cree XLamp XP-G2 220Vac 25°C

				100% 25

				100% 25
				100% 25
				220Vac 25 80% (MIL-HDBK-217F)
				120Vac 80% 75°C
	°		°	
	°		°	5
	°		°	
(L x W x H)	3.46 x 2.52 x 1.26			4.13 x 2.52 x 1.26
(L x W x H)	88 x 64 x 32			105 x 64 x 32



Cree XLamp XP-G2 25°C

0~10V				
0~10V				

EMI	
EMS	



1 EMI

() EMI

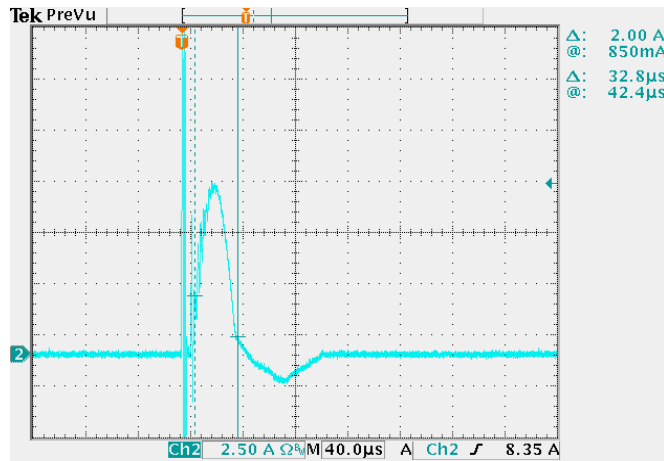
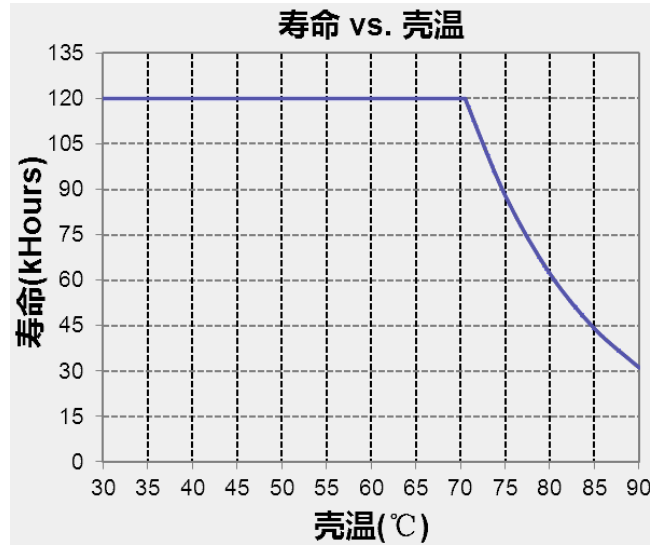



EUC-030S035DVM


EUC-030S050DVM

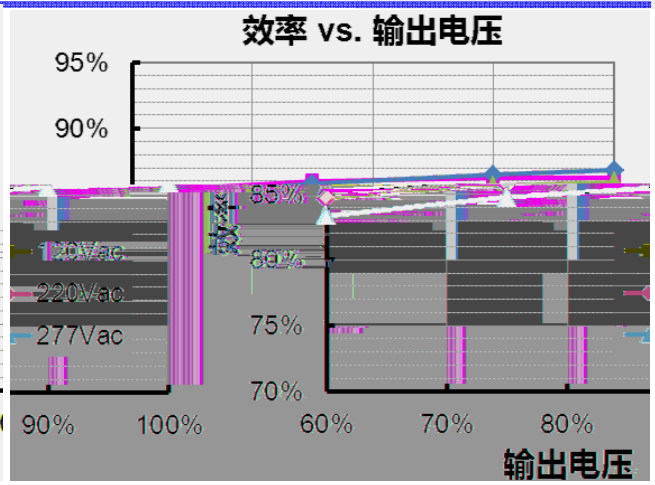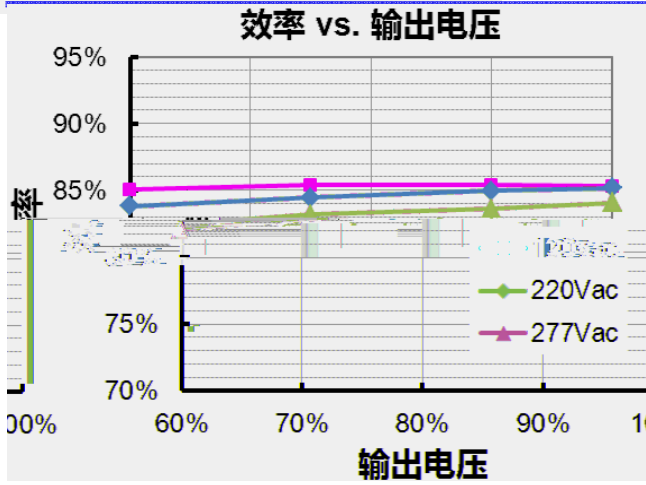



EUC-030S070DVM

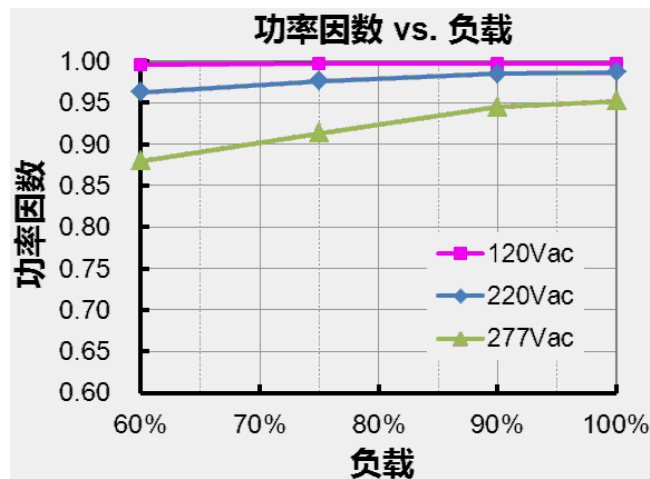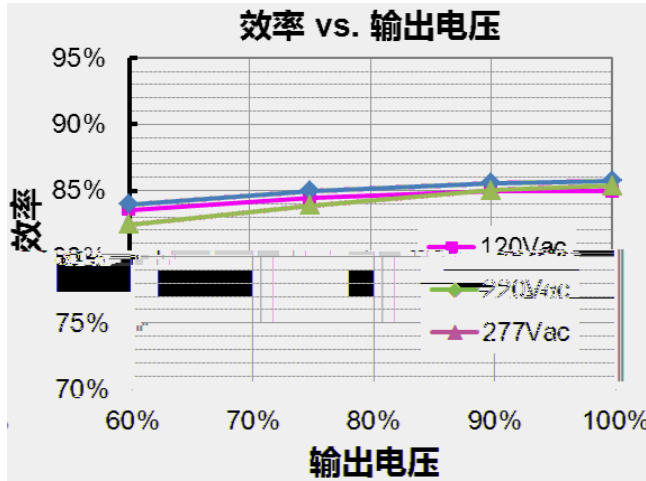



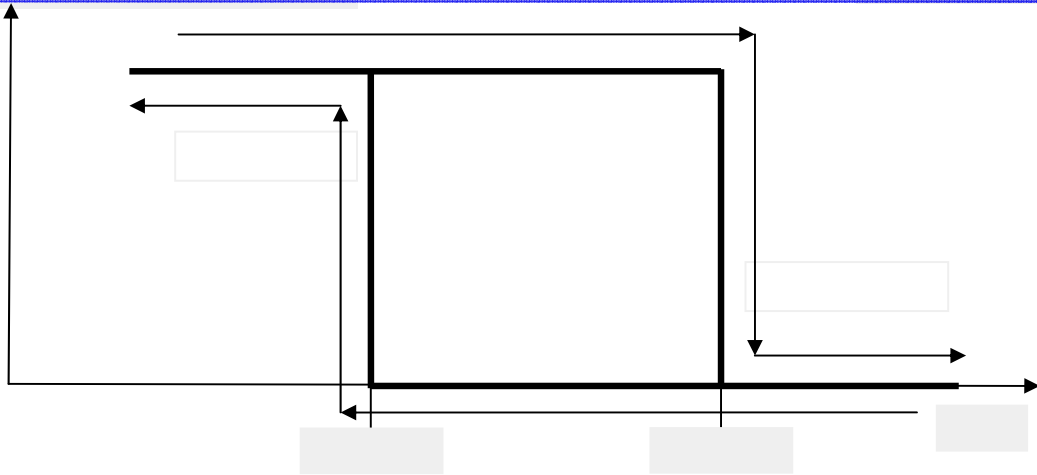

●

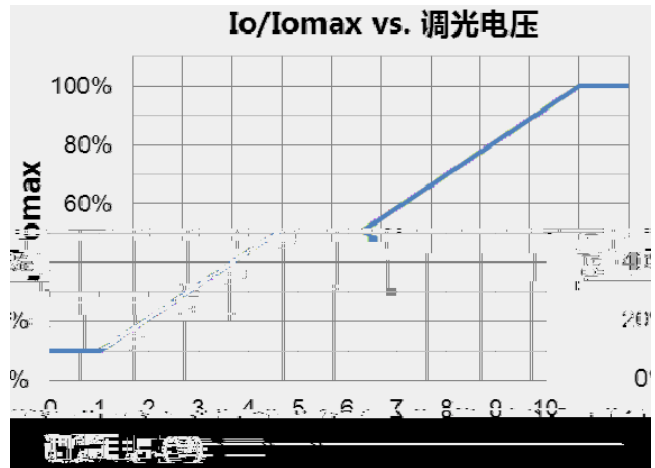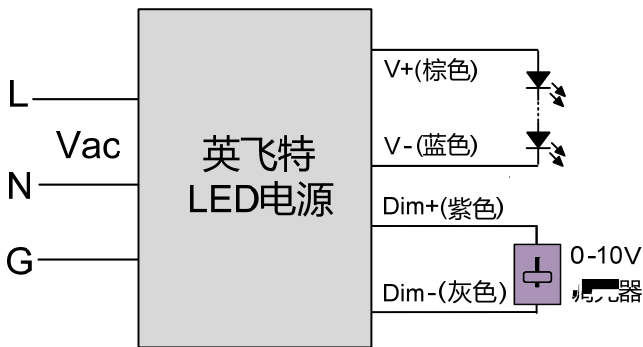

1. 0-10V
2. Dim- V- V+
3. Dim+

INVENTRONICS

EUC-030SxxxDVM000x

Rev. A

			/	/