

-
-
-
-
-
-
-
-
-



					220Vac	277Vac	
24 Vdc	176 ~ 305 Vac	0~20.83 A	500 W	94.0%	0.99	0.96	EBV-500S024ST
28 Vdc	176 ~ 305 Vac	0~17.85 A	500 W	94.0%	0.99	0.96	EBV-500S028ST
36 Vdc	176 ~ 305 Vac	0~13.88 A	500 W	94.5%	0.99	0.96	EBV-500S036ST
42 Vdc	176 ~ 305 Vac	0~11.90 A	500 W	95.0%	0.99	0.96	EBV-500S042ST
48 Vdc	176 ~ 305 Vac	0~10.41 A	500 W	95.0%	0.99	0.96	EBV-500S048ST



	176 Vac	-	305 Vac	
	47 Hz	-	63 Hz	
	-	-	0.75 MIU	UL8750; 277Vac/ 60Hz
	-	-	0.70 mA	IEC60598-1; 240Vac/ 60Hz



	-	-	2.75 A	
	-	-	1.6 A ² s	
	0.90	-	-	
	-	-	20%	

	-5%Vo	-	5%Vo	
(pk-pk)	-	-	2%Vo	20 MHz BW
	-	-	5%Vo	
	-	-	± 0.5%	
	-	-	± 1.0%	
	-	-	2.0 s	
	-	-	0.03%/°C	°C


@220Vac				
Vo = 24 V	91.5%	93.5%	-	
Vo = 28 V	91.5%	93.5%	-	
Vo = 36 V	92.0%	94.0%	-	
Vo = 42 V	92.5%	94.5%	-	
Vo = 48 V	92.5%	94.5%	-	
@277Vac				
Vo = 24 V	92.0%	94.0%	-	
Vo = 28 V	92.0%	94.0%	-	
Vo = 36 V	92.5%	94.5%	-	
Vo = 42 V	93.0%	95.0%	-	
Vo = 48 V	93.0%	95.0%	-	
	-	232,000 Hours	-	
	-	117,000 Hours	-	



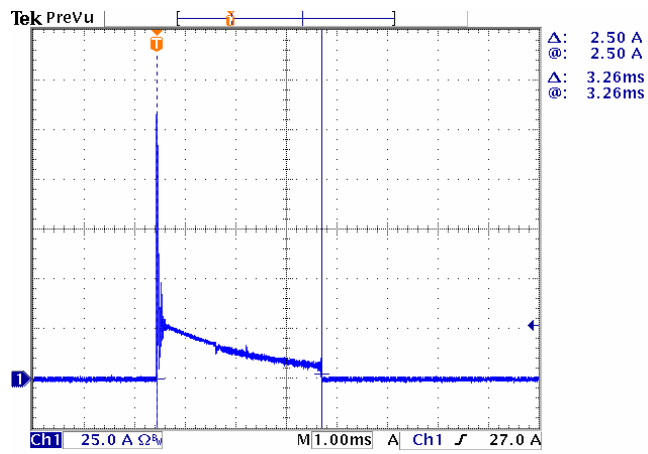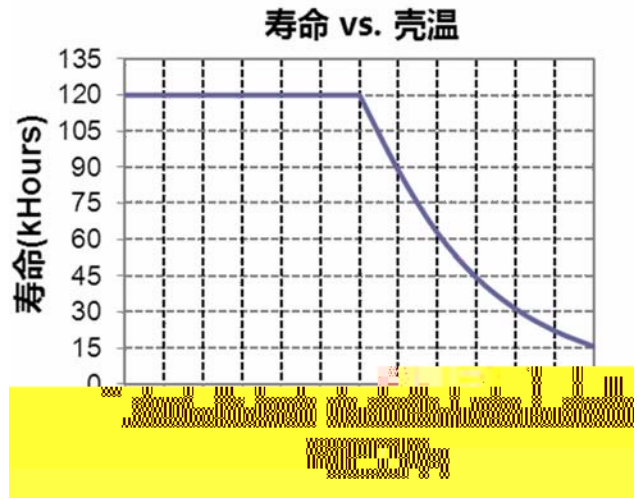

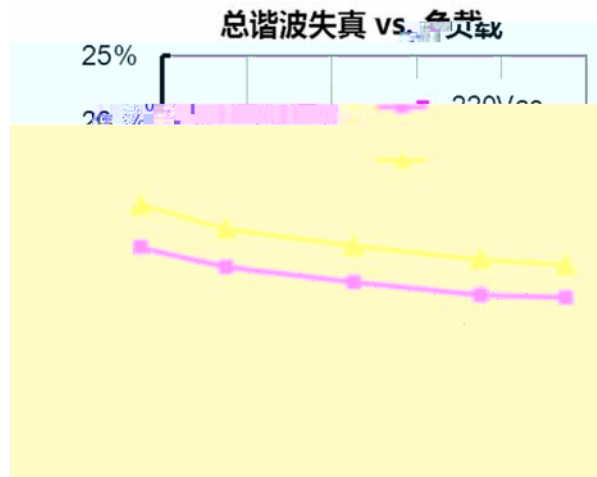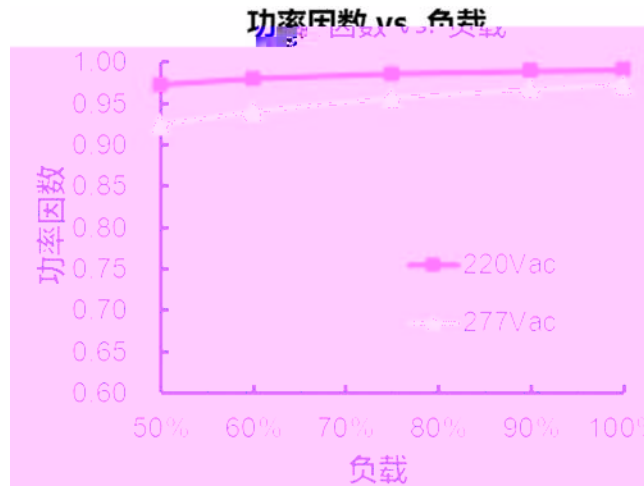

	110% lo	145% lo	180% lo	

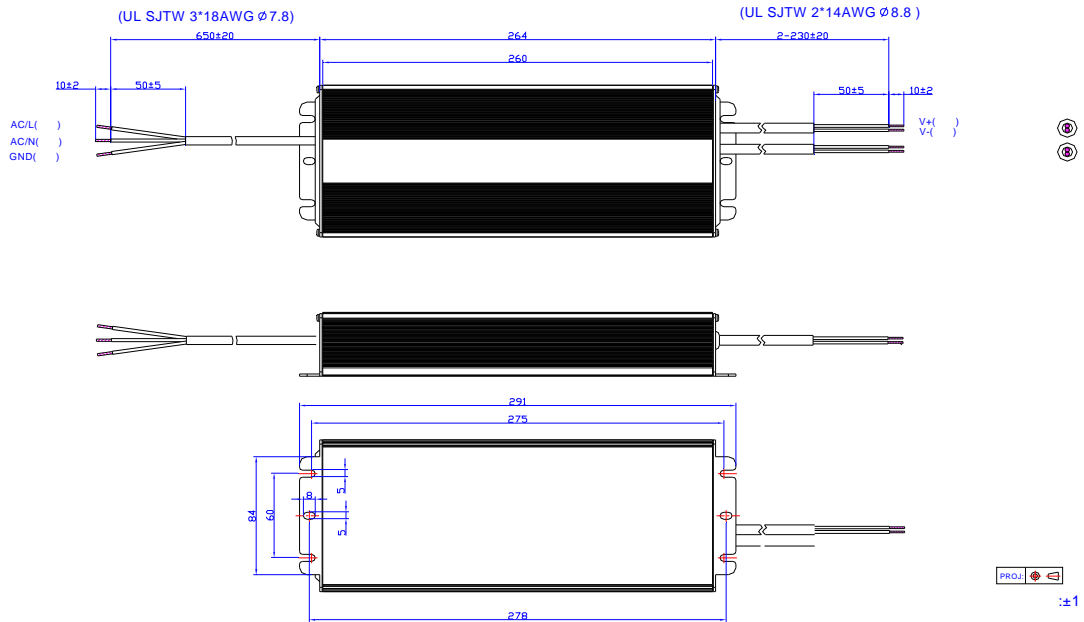

2015-11-27	C			

2021-08-13 D