


	-	-	0.75 MIU	UL8750; 277Vac/60Hz
	-	-	0.70 mA	IEC60598-1; 240Vac/60Hz
	-	-	0.68 A	
	-	-	0.35 A	
	-	-	0.52 A ² s	376
	0.90	-	-	
	-	-	20%	
	-	-	10%	120



	-5%loset	-	5%loset	
LUR-060S105ST LUR-060S150ST	700 mA 1100 mA	- -	1050 mA 1500 mA	
LUR-060S105ST LUR-060S150ST	700 mA 1100 mA	- -	1050 mA 1500 mA	
	-	5%lomax	10%lomax	
	-	2%lomax	-	
	-	-	10%lomax	
LUR-060S105ST LUR-060S150ST	- -	- -	120V 60V	
	-	-	±1.0%	
	-	-	±5.0%	
	-	-	0.5 s	
	-	0.06%/°C	-	°C

@120Vac				
LUR-060S105ST	Io= 700 mA	84.5%	86.5%	-
	Io=1050 mA	84.0%	86.0%	-
LUR-060S150ST	Io=1100 mA	83.5%	85.5%	-
	Io=1500 mA	82.0%	84.0%	-
@220Vac				
LUR-060S105ST	Io= 700 mA	87.5%	89.5%	-
	Io=1050 mA	87.5%	89.5%	-
LUR-060S150ST	Io=1100 mA	86.5%	88.5%	-
	Io=1500 mA	85.0%	87.0%	-
@277Vac				
LUR-060S105ST	Io= 700 mA	88.0%	90.0%	-
	Io=1050 mA	88.0%	90.0%	-
LUR-060S150ST	Io=1100 mA	87.0%	89.0%	-
	Io=1500 mA	85.5%	87.5%	-
	-		434,000 Hours	-
	-		94,000 Hours	-
	-40 °C	-	+85 °C	
	-40 °C	-	+75 °C	湿度: 10%RH to 90%RH
	-40 °C	-	+85 °C	: 5%RH to 95%RH
	-	415 g	-	

UL/CUL	UL 8750, UL 1310, CAN/CSA-C22.2 No. 250.13, CAN/CSA-C22.2 No. 223-M91
CE	EN 61347-1, EN61347-2-13
CB	IEC 61347-1, IEC 61347-2-13
CCC	GB 19510.1, GB 19510.14
KS	KS C 7655


EMI	
EN 55015/GB 17743 ⁽¹⁾	Conducted emission Test & Radiated emission Test
EN 61000-3-2/GB 17625.1	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
FCC Part 15 ⁽¹⁾	ANSI C63.4 Class B
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired operation.
EMS	
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 4 kV, Common Mode 6kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

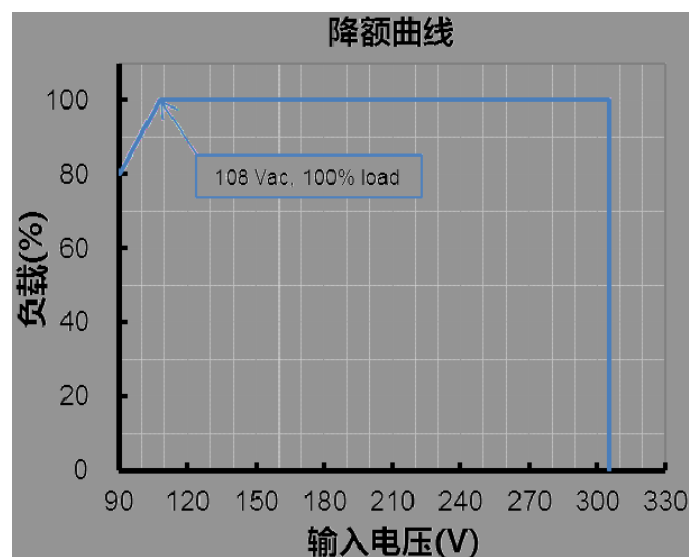

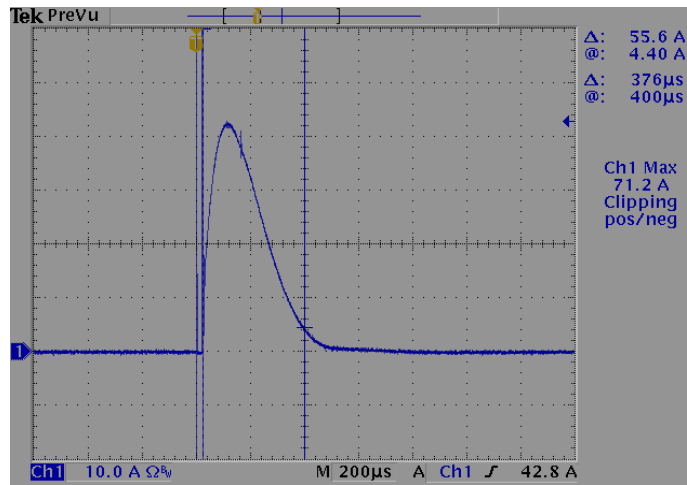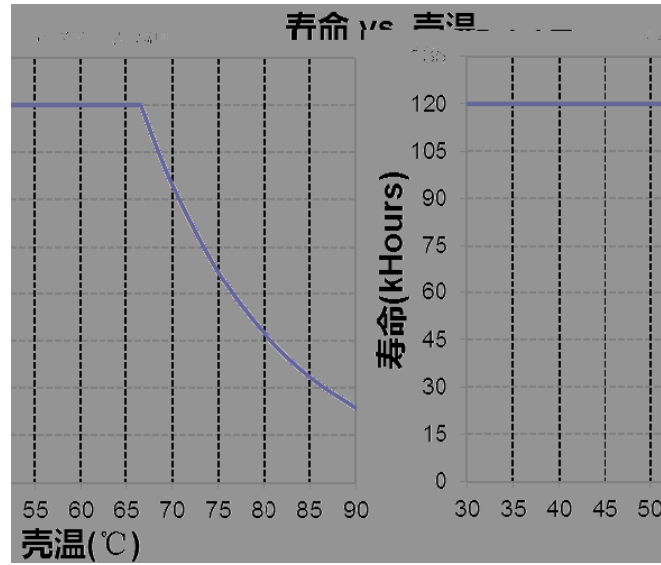


LUR-060S105ST($I_o=700mA$)

效率 vs. 输出电压

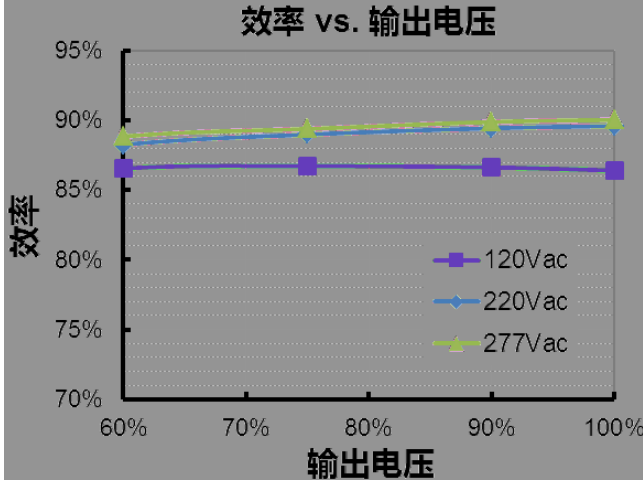


LUR-060S105ST($I_o=1050mA$)

效率 vs. 输出电压

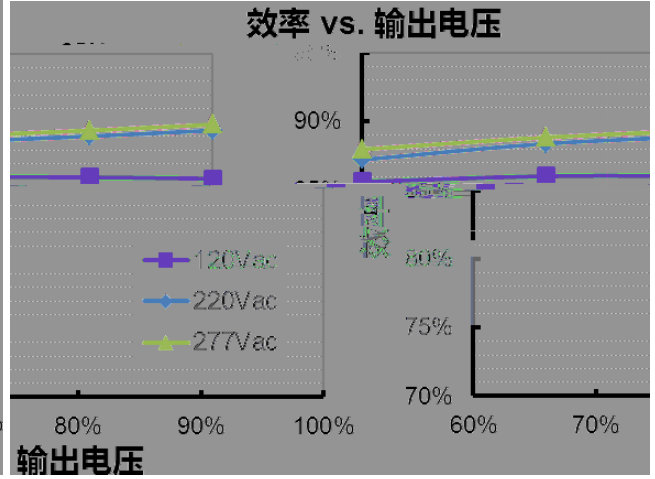


LUR-060S150ST($I_o=1100mA$)

效率 vs. 输出电压

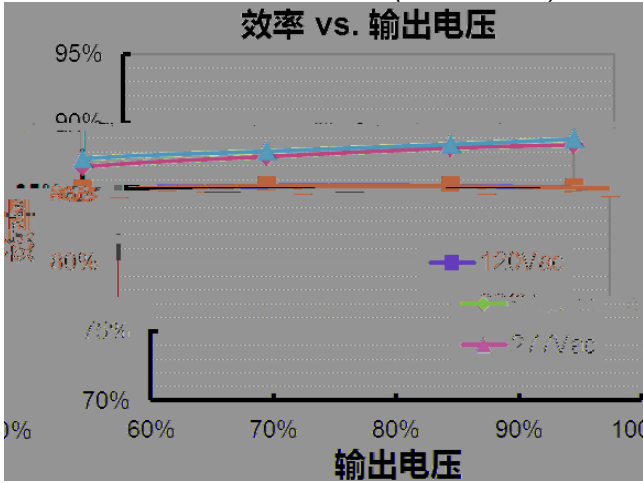


LUR-060S150ST($I_o=1500mA$)

效率 vs. 输出电压

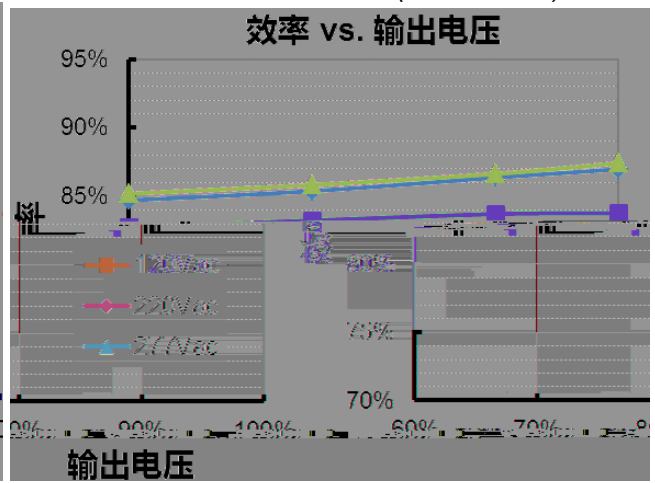



功率因数 vs. 负载

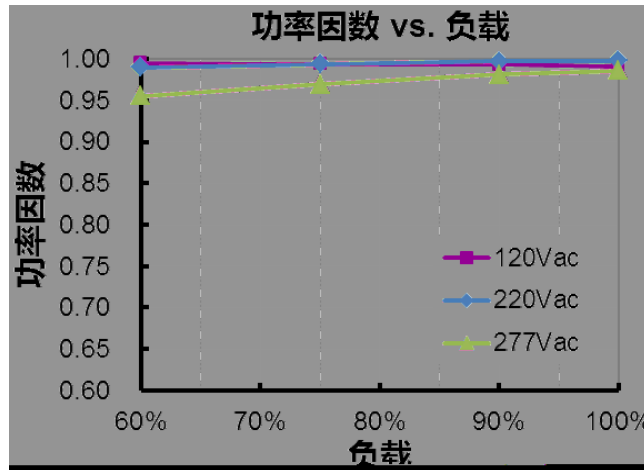

6 / 8

25°C

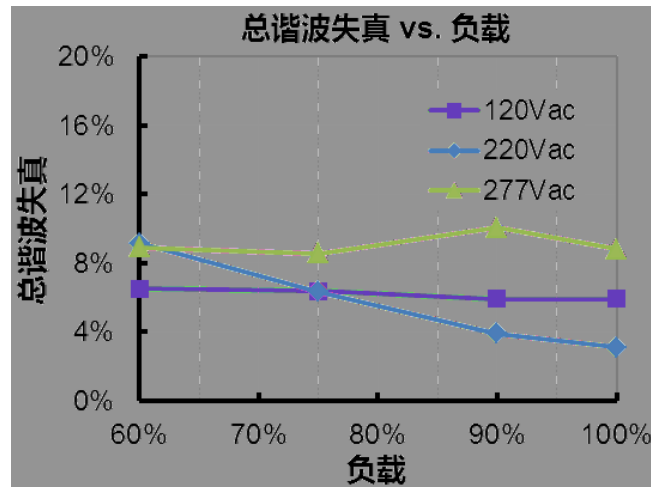

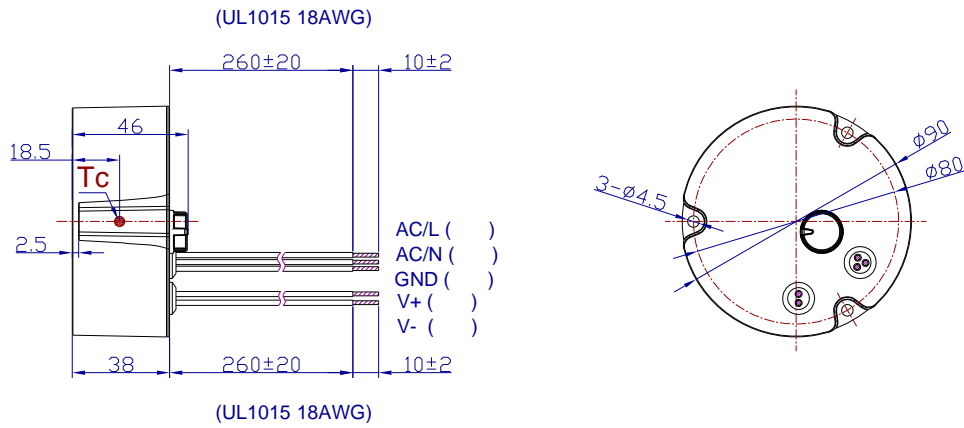

PROJ:

: ±1

RoHS

2020-09-03	A			