

- K? ; (' fl
- O' %fl
- 1 +bM -bM
-
- : @jj @
-
- Ł
- @--
- 5




< : \$. , J (' , JK\$ ' ' x . , N @--

(+ ' \$* ' , Mac

	(1)(2)			(3)	(3)	
700 mA	140 ~ 305 Vac	54 ~ 107 Vdc	75 W	90.5%	0.96	EDC-075S105ST-0007
860 mA	140 ~ 305 Vac	44 ~ 88 Vdc	75 W	90.5%	0.96	14... (/5 ! d 1)) /5 A+ Mac

) (' \$* ' , M/) (' \$* ' , M/ *))' Mac (' fl

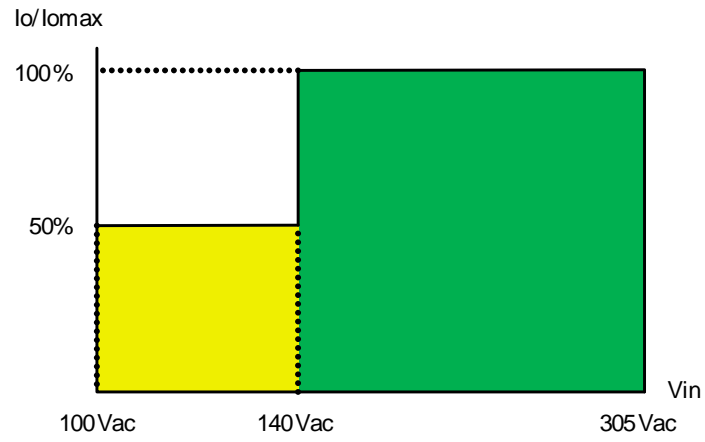

	140 Vac	-	305 Vac	
	47 Hz	-	63 Hz	
	-	-	0.70 mA	IEC60598-1; 240Vac/60Hz
	-	-	0.42 A	

	-	-	0.5 s	220Vac, 75%-100%
	-	0.06%/°C	-	= 0°C-Tc

: iee OCad g OP\$>)

@220Vac: EDC-075S105ST-0007 EDC-075S105ST-0004 EDC-075S105ST	88.5% 88.5% 88.0%	90.5% 90.5% 90.0%	- - -	(' ' fl),) %fl
	-	806,000 Hours	-)' Mac), /' fl ŽD @S ?; 9B\$ (. =ž
	-	101,000 Hours	-)' Mac /' fl , , °:
	-40°C	-	+90°C	
	-40°C	-	+75°C	' : 10%RH to 95%RH
	-40°C	-	+85°C	: 5%RH to 95%RH
ŽC × N × ? ž ŽC × N × ? ž	+%O ×) %) × (%- ((+ × - + × *)			, %- ×) %) × (%- (* (× - + × *)
	-	500 g	-	


: iee OCad g OP\$>)


CE	EN 61347-1, EN 61347-2-13
KS	KS C 7655
BIS	IS 15885(PART2/SEC13)
EN 55015 ⁽¹⁾	Conducted emission Test &Radiated emission Test
EN 61000-3-2	Harmonic current emissions

EN 61000-3-3	Voltage fluctuations & flicker
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 4 kV, Common Mode 6 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

(<D @


Ž ž <D @

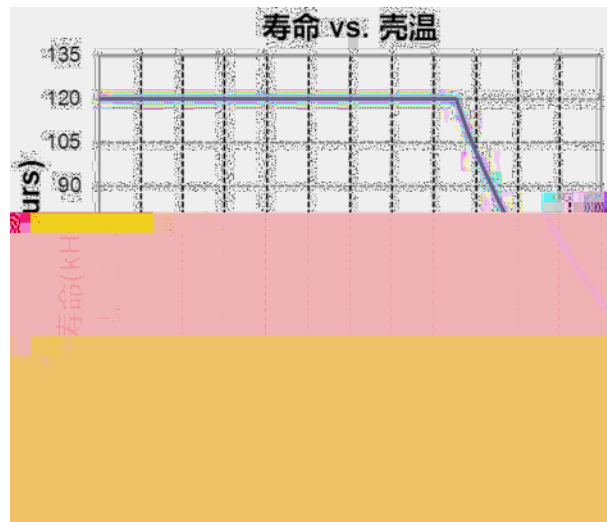

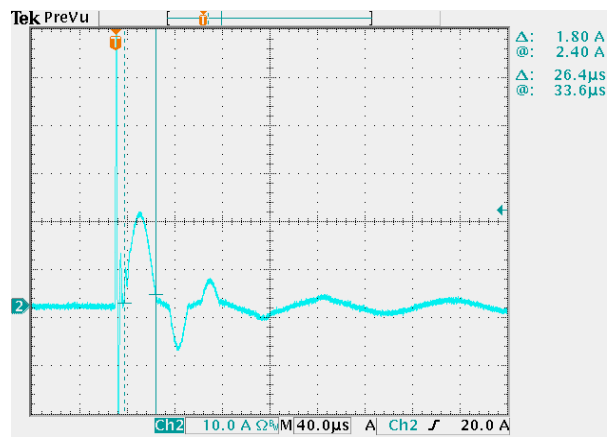


EDC-075S105ST($I_o=1050\text{mA}$)

效率 vs. 输出电压

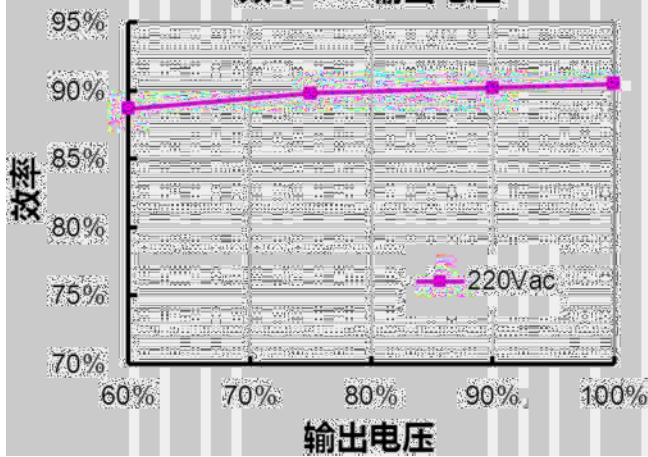


EDC-075S105ST-0004($I_o=860\text{mA}$)



效率 vs. 输出电压

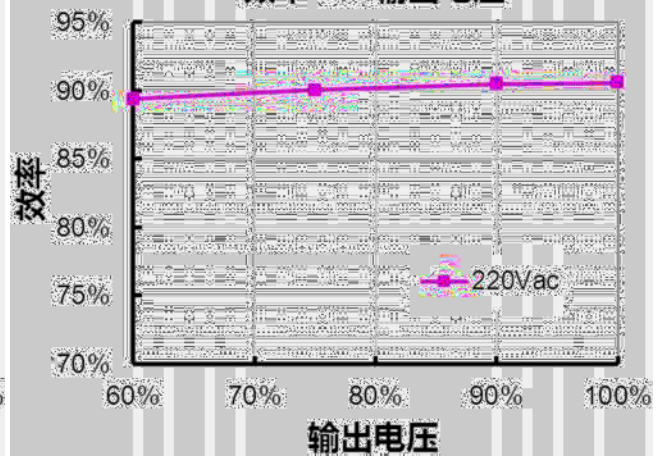

EDC-075S105ST-0007($I_o=700\text{mA}$)

效率 vs. 输出电压

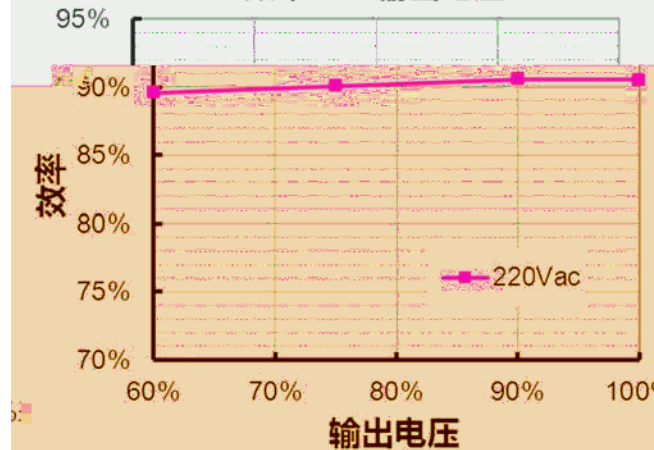


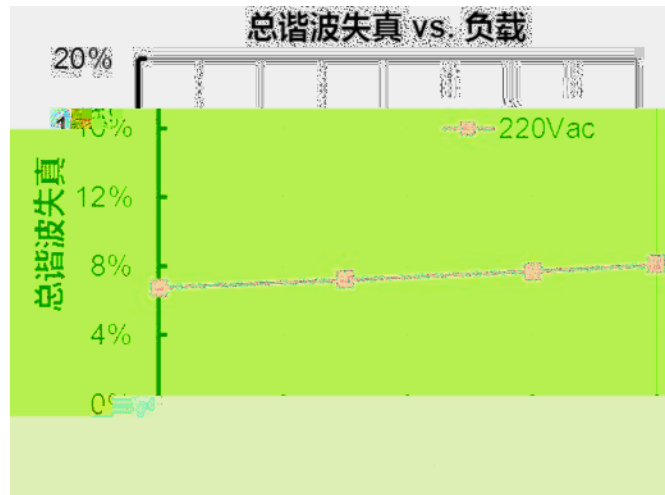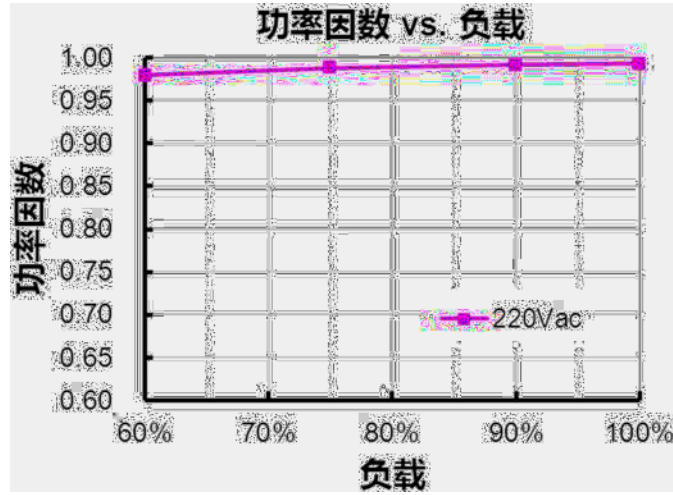

	100V			

		320 Vac	340 Vac	360 Vac

9

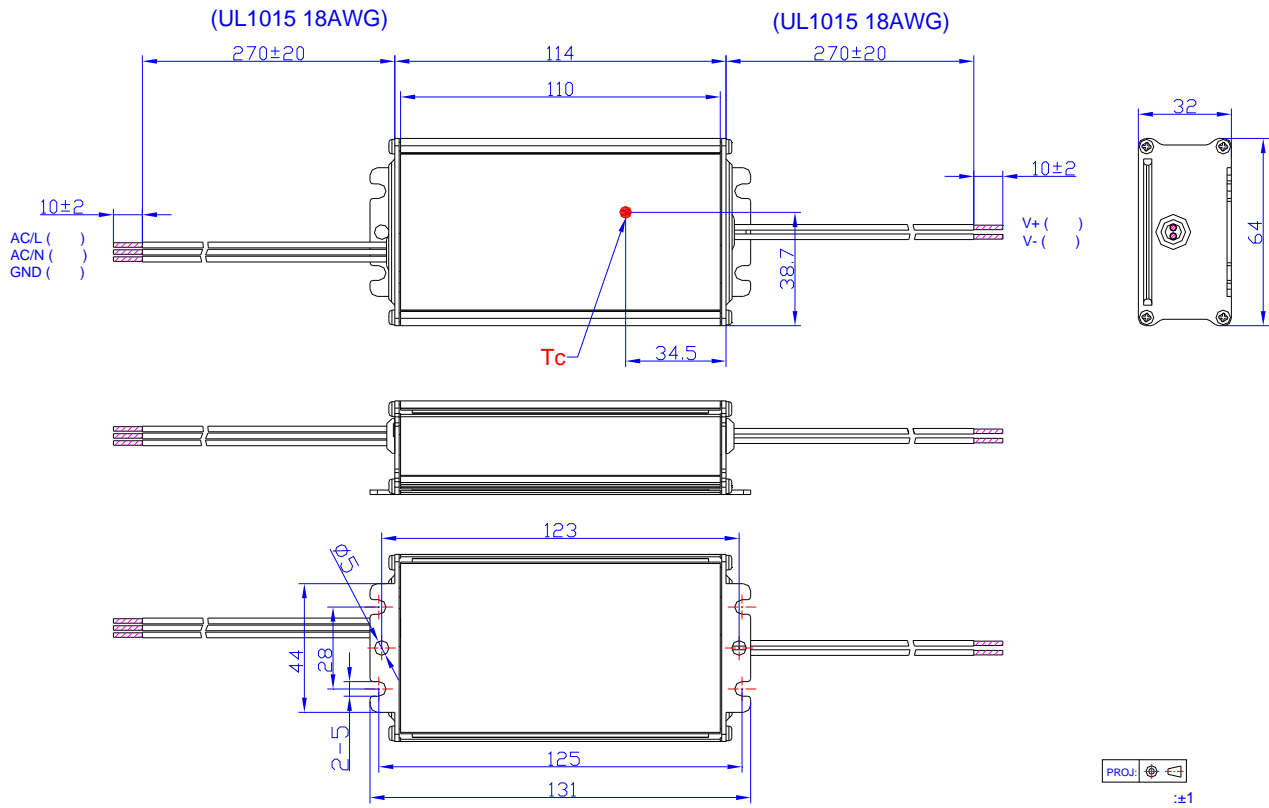

RoHs

! f? J)' ((& , & L

< L)' (, & / - *

X

EDC-075S105ST-000x

Rev. C

75W IP66